


APPLICATION

- Note PC power system， incl. IMVP-6
- 5/к5/ ŏ2уØŜЩúŜЩ

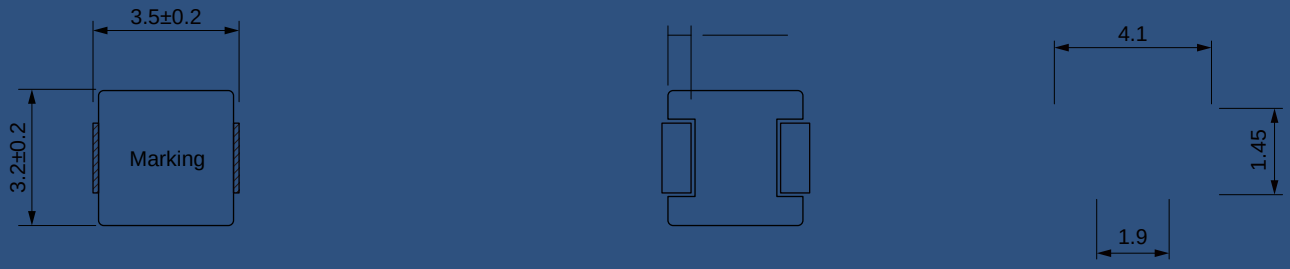

Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
MDCA3012-R22M	0.22	±20%	c¢p	10.0	14.0	17.0
MDCA3012-R33M	0.33	±20%	6.2	9.2	16.0	20.0
MDCA3012-R36M	0.36	±20%	6.0	y¢p	му¢р	23.0
MDCA3012-R47M	0.47	±20%	р¢л	7.2	нр¢л	30.0
а5/!олмнпwрса	л¢рс	±20%	п¢р	6.6	31.0	36.0
MDCA3012-R68M	0.68	±20%	4.0	6.1	34.0	40.0
MDCA3012-R82M	0.82	±20%	о¢р	р¢у	41.0	48.0
MDCA3012-1R0M	1.00	±20%	3.3	р¢р	рл¢л	60.0
а5/!олмнпмwра	м¢рл	±20%	3.0	4.0	71.0	ур¢л
MDCA3012-2R2M	2.20	±20%	2.7	3.4	98.0	ммр
MDCA3012-3R3M	3.30	±20%	2.0	3.1	191	210
MDCA3012-4R7M	4.70	±20%	1.6	2.8	266	293
а5/!олмнпрwса	р¢сл	±20%	м¢р	2.2	310	360
MDCA3012-6R8M	6.80	±20%	1.4	2.0	360	400

A0


KOHicPeProperties:5 0 -Td6661.026J17p10ŷeDons:[nm][C]753.38615 4eW842 490.5107]L 37LandPattern:[nm][C]þ scn94 0.082 scn1o scn


sQ[illegible]AIP[illegible]E
High reliability.


Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Satura on Current Typ. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
MDCA3012-8R2M	8.20	±20%	1.2	1.7	420	463
MDCA3012-100M	10.0	±20%	1.0	1.4	498	ppл


Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C


Typical Electrical Characteristics:

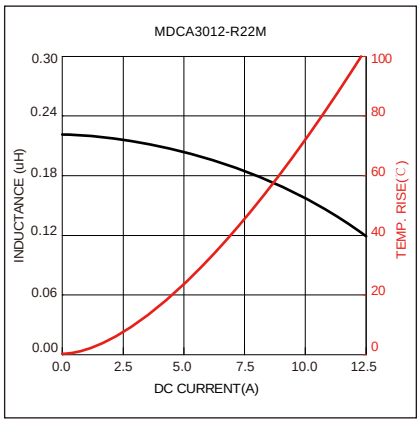


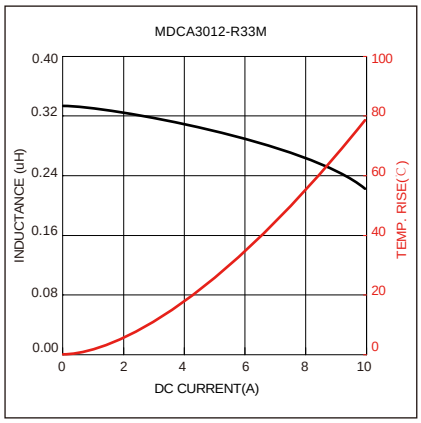


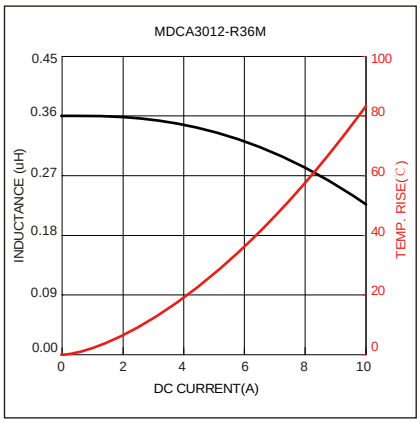


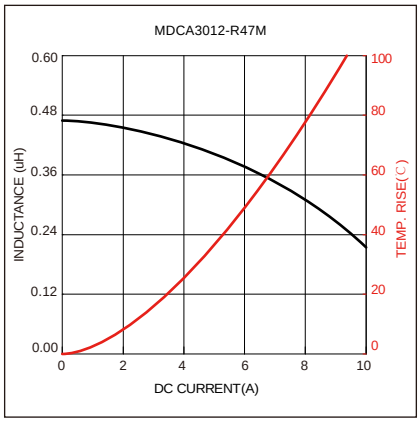


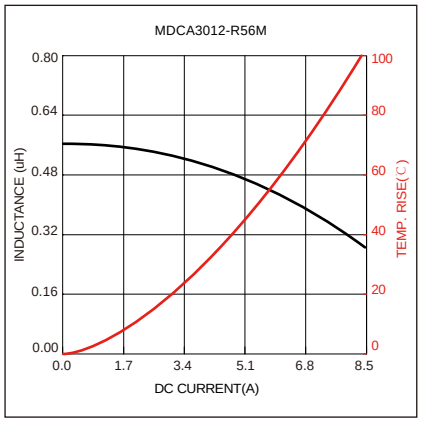


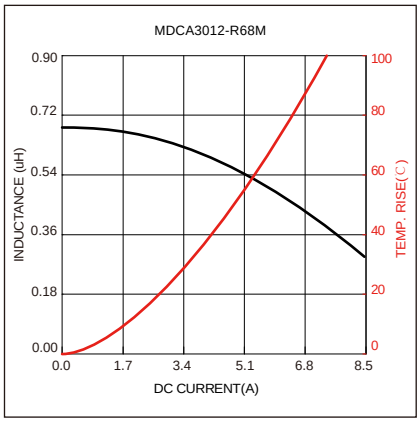


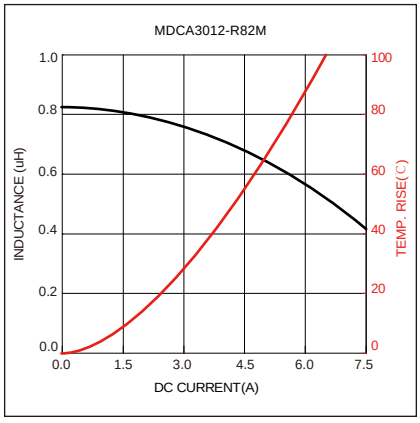


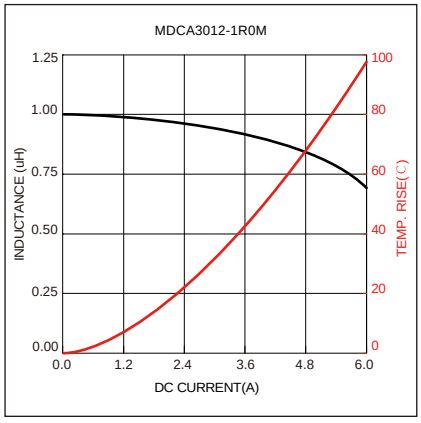


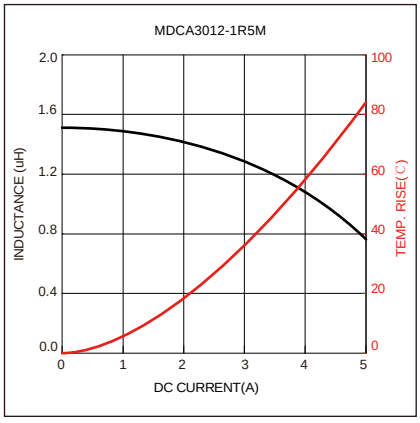


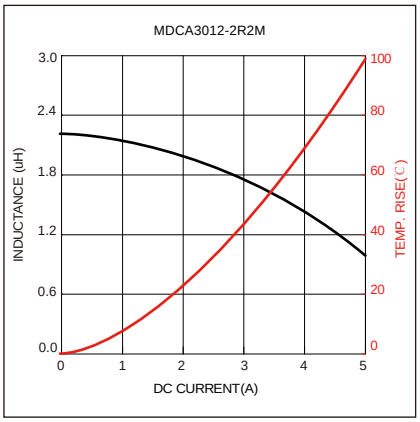


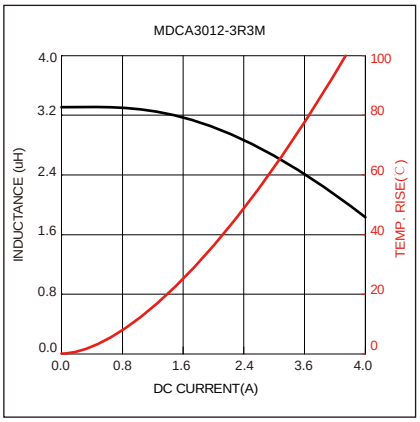


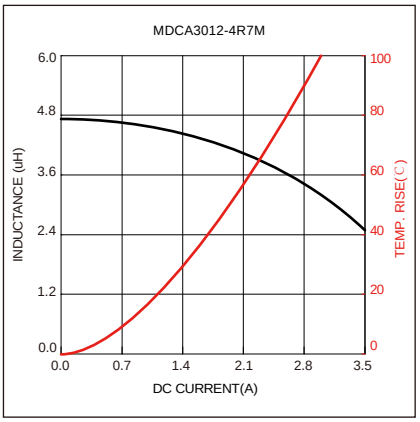

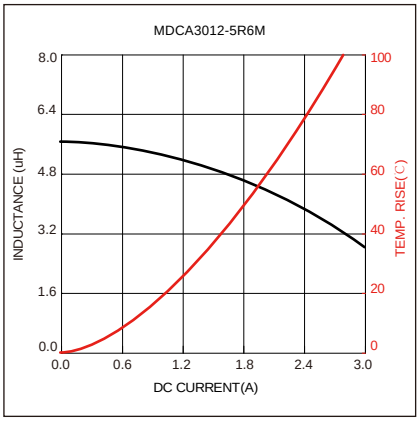

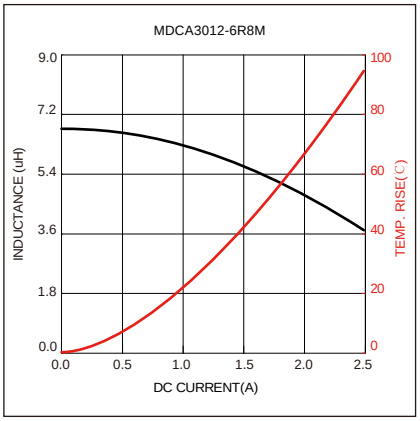

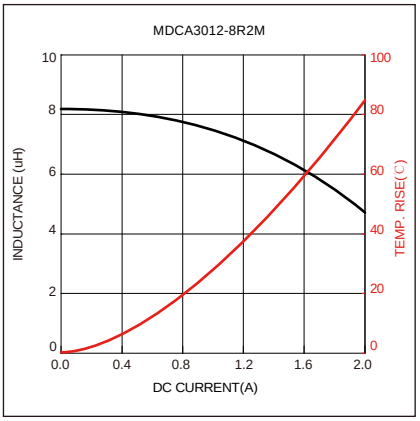

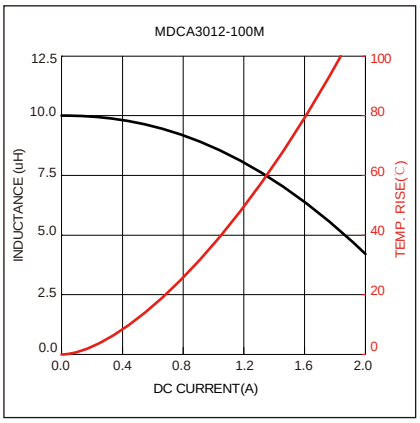

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com