**MDTE Series**
Wire Wound Molded SMD Power Inductors
Size 1513



**FEATURES**

- 
- 
- 
- 
- 
- 
- 

℃

**APPLICATION**

- 
- 

## Dimensions: [mm]

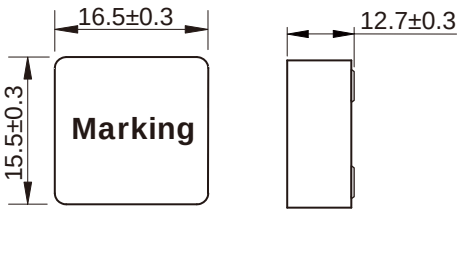





## Land Pattern: [mm]




## Electrical Properties:

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Saturation Current will cause L to drop approximately 30%
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C

KOHER Electronic
4546 BATES DRIVE, YORBLINDA CA 92886 USA
714-325-4789 Contact@kohergroup.com

## Soldering Reflow:

## Packaging Information:

### Tape Dimension:

| Series | A0 (mm) | B0 (mm) |
|---|---|---|

### Peel force of top cover tape:

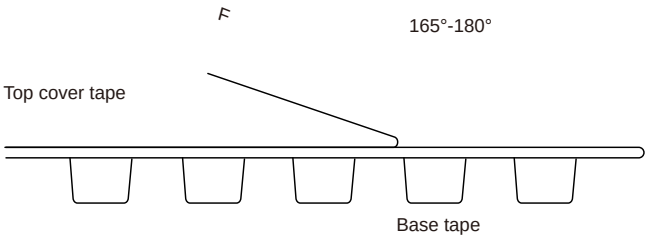

Reel Dimension：[mm]



Packaging Quantity: